

# In-Stock Catalog



**C. N. Robinson Lighting Supply Co., Inc.**

**[www.cnrlight.com](http://www.cnrlight.com)**

**Baltimore: 800-545-0440    Virginia: 800-545-0441**

# *Lighting... It's What We Do.*

*We are a dynamic and valued business partner.*

*We are always a step ahead, prepared for the changing of time and customer needs.*

*We are driven by strong values, accountability, and high standards.*

## *We Are CNR.*

*And we are here for you now, just like we always have been, since 1870!*





# Table of Contents

## **Interior Solutions**

<b>Architectural Troffers</b>	<b>3 - 4</b>
<b>Troffers &amp; Flat Panels</b>	<b>5</b>
<b>Wraparounds</b>	<b>6 - 7</b>
<b>Strip Lights</b>	<b>7 - 9</b>
<b>Retrofit Kits</b>	<b>10</b>
<b>High Bays</b>	<b>11</b>
<b>Recessed Trim Kits</b>	<b>11 - 12</b>
<b>Downlights</b>	<b>13 - 14</b>

## **Interior & Exterior Solutions**

<b>Vaporlume</b>	<b>14</b>
------------------	-----------

## **Exterior Solutions**

<b>Garage &amp; Canopy</b>	<b>15</b>
<b>Flood Lights</b>	<b>16 - 18</b>
<b>Wallpacks</b>	<b>19 - 20</b>
<b>Exit Signs</b>	<b>21</b>
<b>Emergency Lights</b>	<b>22</b>

## **Miscellaneous**

<b>Lighting Controls</b>	<b>23 - 24</b>
<b>LED Tunable Drivers</b>	<b>25</b>
<b>Batteries</b>	<b>26</b>
<b>Wire Nuts &amp; Connectors</b>	<b>27</b>
<b>Recycling</b>	<b>28</b>

# Interior Solutions - Architectural Troffers

## **LCAT: 2' x 2' LED Contemporary Architectural Troffer**

**29W, 3420LM, 3500K, 80 CRI, 120-277V, 0-10V DIM**

**#LCAT22-35MLG-EDU**

**29W, 3473LM, 4000K, 80 CRI, 120-277V, 0-10V DIM**

**#LCAT22-40MLG-EDU**

**Columbia**  
LIGHTING



\* DLC qualification can change without notice



- High efficiency acrylic center lens features linear prisms for high performance without pixilation
- 60,000 hour LED at L80 (up to 150,000 projected life) for reduced maintenance
- 3500K, 4000K available by order
- QR code traceability
- Recessed, surface, or cable mount
- Five year warranty (Terms and conditions apply)



## **LCAT: 2' x 4' LED Contemporary Architectural Troffer**

**39W, 4914LM, 3500K, 80 CRI, 120-277V, 0-10V DIM**

**#LCAT24-35MLG-EDU**

**39W, 4990LM, 4000K, 80 CRI, 120-277V, 0-10V DIM**

**#LCAT24-40MLG-EDU**



\* DLC qualification can change without notice

# Interior Solutions - Architectural Troffers



\* DLC qualification can change without notice

## FluxGrid 1' x 4' LED Architectural Troffers

**24.5W, 3000 LM, 4000K, 120-277V, 80 CRI, 0-10V DIM  
Integrated Daylight Harvesting and Occupancy Sensor  
#1FGG30L840-4-D-UNV-DIM-DAYOCC  
#1FGG38L840-4-D-UNV-DIM-DAYOCC**

**31.9W, 3800 LM, 4000K, 120-277V, 80 CRI, 0-10V DIM  
Integrated Emergency Battery Pack and Daylight  
Harvesting and Occupancy Sensor  
#1FGG38L840-4-D-UNV-EMLED-DIM-DAYOCC**

- Access to the boards and driver from below
- Offers architectural appeal
- Two different lens styles
- Discrete air handling
- Integral emergency



\* DLC qualification can change without notice

## FluxGrid 2' x 2' LED Architectural Troffers

**27.1W, 3000 LM, 4000K, 120-277V, 80 CRI, 0-10V DIM  
Integrated Daylight Harvesting and Occupancy Sensor  
#2FGG30L840-2-D-UNV-DIM-DAYOCC**



\* DLC qualification can change without notice

## FluxGrid 2' x 4' LED Architectural Troffers

**36.2W, 4300 LM, 4000K, 120-277V, 80 CRI, 0-10V DIM  
Integrated Emergency Battery Pack and Daylight  
Harvesting and Occupancy Sensor  
#2FGG43L840-4-D-UNV-EMLED-DIM-DAYOCC**


## Interior Solutions - Troffers

---

**Columbia**  
LIGHTING

### **LJT: 2' x 2' LED TROFFER**

**33W, 3743LM, 4000K, 80 CRI, 120-277V, 0-10V DIM**  
**#LTJ22-40HLG-FSA12-ED**

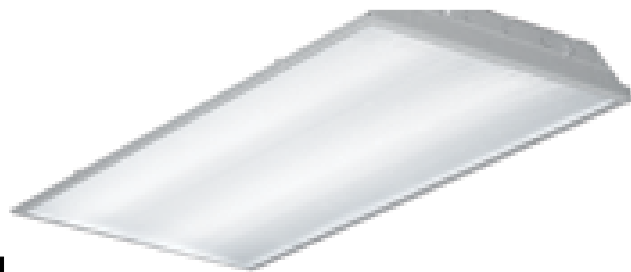

### **LJT: 2' x 4' LED TROFFER**

**45W, 5526LM, 4000K, 80 CRI, 120-277V, 0-10V DIM**  
**#LJT24-40HLG-FSA12-EDU**

- Long life, 60,000 hour LEDs at L80 reduce life cycle maintenance cost
- Fixed output, step dimming, or 0-10V dimming drivers available by order
- Many shielding choices available by order available by order



\* DLC qualification can change without notice

---

## Interior Solutions - Flat Panels

---

### **FPL: 2' x 2' LED FLAT PANEL**

**28W, 3330LM, 5000K, 80 CRI, 120-277V, 0-10V DIM**  
**#FLP22-28W850-UB4**



### **FPL: 2' x 4' LED FLAT PANEL**

**36W, 4429LM, 5000K, 80 CRI, 120-277V, 0-10V DIM**  
**#FPL24-36W850-UB2**

- Narrow frame with large light emitting surface
- Wiring compartment for fast installation
- Integral grid clips and auxiliary suspension points
- Full panel diffusion and uniformity
- Five year limited warranty



\* DLC qualification can change without notice

# Interior Solutions - Wraparounds

## FLUXSTREAM WRAPAROUND

### FSW: 4' LED WRAPAROUND

**31.4W, 3856LM, 4000K, 120-277V, 80 CRI, 0-10V DIM**

**#FSW-440-L840-UNV-DIM**

**#FSJW** accessory required for continuous row mounting, one FSWJ at each joint

- Up to 100,000 hour predicted L70 LED lumen maintenance
- Compact design for installation in tight spaces
- Injection molded lens retainers provide positive diffuser retention, and easy tool-free access to LED boards and driver
- Wall Mountable - ADA compliant
- Ideal for cold applications (-20°C to 25°C)
- Enclosed lens minimizes penetration of dust, insects, and other debris into the lamp compartment

**Day-Brite**  
**CFI**  
by **Signify**



**\* DLC qualification can  
change without notice**



## LINEAR WRAPAROUND

### FSWEZ: 4' EZ LED WRAPAROUND

**32W, 3325LM, 4000K, 80 CRI, 120-277V**

**#PFSWEZ-440-L840-UNV**

- Up to 50,000 hour predicted L70 LED lumen maintenance
- Compact design for installation in tight spaces
- Injection molded lens retainers provide positive diffuser retention, and easy tool-free access to LED boards and driver
- Wall Mountable - ADA compliant
- Ideal for cold applications (-20°C)
- Enclosed lens minimizes penetration of dust, insects, and other debris into the lamp compartment
- Five year limited warranty

**PHILIPS**  
**Light to go**

# Interior Solutions - Wraparounds

## OWL WRAPAROUND

### OWL: 4' LED WRAPAROUND

**37W, 3933LM, 4000K, 80 CRI, 120-277V DIM**

**#OWL440L840-UNV-DIM**

- Long life LEDs provide 50,000 hours maintenance free system life
- Durable 100% frost acrylic lens shields LEDs from direct view
- Ceiling or suspended mounting
- Snap in LED pan and driver support is tool free for ease of installation
- Five year limited warranty



\* DLC qualification can



**Day-Brite**  
**CFI**

by **Signify**

# Interior Solutions - Strip Lights

## LCS: 4' OPEN STRIPLIGHT/LED

**42W, 5661LM, 4000K, 80 CRI, 0-10V DIM**

**#LCS4-40MLEDU**

## LCS: 8' OPEN STRIPLIGHT/LED

**83W, 11322LM, 4000K, 80 CRI, 0-10V DIM**

**#LCS8-40MLEDU**

- Long life 60,000 hour LEDs at L80 for reduced maintenance
- LED boards and driver accessible for future maintenance and upgrades
- Surface mount or suspended
- 3000K, 3500K, 5000K available by order
- Five year warranty



\* DLC qualification can  
change without notice



**Columbia**  
**LIGHTING**



# Interior Solutions - Strip Lights

---



## LIGHT TO GO LINEAR STRIP

### PFSSEZ: 4' LED LINEAR STRIP

**32W, 3653LM, 4000K, 80 CRI, 120-277V**

**#PFSSEZ440L840UNV**



\* DLC qualification can change without notice

- Up to 50,000 hour predicted L70 LED lumen maintenance
- Compact design for installation in tight spaces
- Can be surface mounted on ceilings or walls (ADA compliant), or suspended via chain, pendants or cables.
- Ideal for cold applications (-20°C )
- Frosted acrylic diffuser provides wide light distribution and superior glare control
- Enclosed lens minimizes penetration of dust, insects, and other debris into the lamp compartment
- Five year limited warranty



# Interior Solutions - Strip Lights



## FLUXSTREAM INDUSTRIAL

### FSI: 4' LED INDUSTRIAL STRIP

**31W, 4169LM, 4000K, 120-277V, 80 CRI, 0-10V DIM**  
**#FSI-440-L840-UNV-DIM**

**Day-Brite**  
**CFI**  
by **signify**

- Up to 100,000 hour predicted L70 LED lumen maintenance
- Diffuser and LED plate snap into place allowing tool-free access to LED boards and driver
- Can be surface mounted on ceilings or walls (ADA Compliant), or suspended via chain, pendants or cables
- Frosted acrylic diffuser provides wide light distribution and superior glare control
- Ideal for cold applications (-20°C )
- Enclosed lens minimizes penetration of dust, insects, and other debris into the lamp compartment
- Five year limited warranty



## LIGHT TO GO LINEAR INDUSTRIAL

### PFSI: 8' LED INDUSTRIAL

**90W, 11652LM, 4000K, 80 CRI, 120-277V DIM**  
**#PFSI8110L840-UNV-DIM**

**PHILIPS**  
**Light to go**

- Up to 100,000 hour predicted L70 LED lumen maintenance
- Compact design for installation in tight spaces
- Diffuser and LED plate snap into place allowing tool-free access to LED boards and driver
- Frosted acrylic diffuser provides wide light distribution and superior glare control
- Wall mountable - ADA compliant
- Ideal for cold applications (-20°C )
- Enclosed lens minimizes penetration of dust, insects, and other debris into the lamp compartment
- Five year limited warranty



# Interior Solutions - Retrofit Kits



## 4' LED RETROFIT KIT

**41.6W, 4600LM, 4000K, 120-277V, 82 CRI**  
**#LRK244-46L840-U**

**61.6W, 6000LM, 4000K, 120-277V, 82 CRI**  
**#LRK24-60L840-U (Not Rebate Eligible)**

**61.6W, 6000LM, 5000K, 120-277V, 82 CRI**  
**#LRK24-60L850-U**




- Fast and easy to install
- No redesign or revised layout needed
- Diffuser provides broad, even light distribution
- LED system efficacies exceeding 120 LPW
- Equipped with 0-10V dimmable LED driver to 1%
- Seven year limited warranty



\* DLC qualification can change without notice

Remove existing lamps and ballasts before installation. Attach LED modules by double sided foam tape on light bar. Secure light bar to fixture with the provided self-tapping screws. Connect the driver and replace the lens.

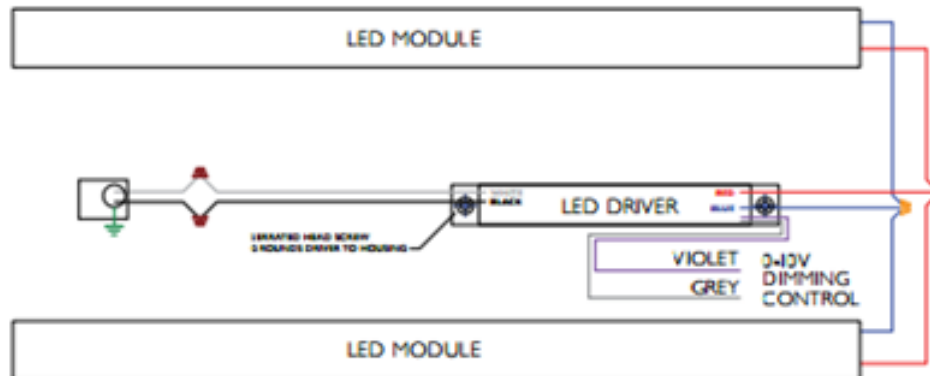

## Interior Solutions - High Bays

**Day-Brite**

**CFI**

by Signify



### INDUSTRIAL

#### RBX: LED HIGH BAY

**159W, 20122LM, 4000K, 80 CRI, 120-277V**

**#RBX20L840-UNV-WT**

**#WGA16** 16" wire guard available, sold separately

**#AR16RS** open 16" clear acrylic reflector available, sold separately



\* DLC qualification can change without notice

- Ideal for retail, industrial, commercial, or other large indoor areas
- Simple suspension mounting
- Standard 0-10V dimming
- Optional integral emergency backup
- Five year limited warranty

## Interior Solutions - Trim Kits



### LED RECESSED RETROFIT

#### 5/6" RECESSED RETROFIT

**12W, 1300LM, 3000K, 120V, 80 CRI**

**#LED14DR5630K**

- Long life: 35,000 hours
- Very low heat generation
- Easy installation and integrated trim
- Shatter resistant
- Smooth uniform dimming
- Five year warranty



\* Energy Star qualification can change without notice



# Interior Solutions - Trim Kits

---

## LIGHTOLIER

by  signify

### **COREPRO LED 4"**

#### **CP4: DOWNLIGHT**

**11W, 750LM, 3000K, 90 CRI, 120V**

**#CP4RB07930W**

### **COREPRO LED 6"**

#### **CP6: DOWNLIGHT**

**14W, 1200LM, 3000K, 80 CRI, 120V**

**#CPRB10830W**

**14W, 1250LM, 4000K, 80 CRI, 120V**

**#CP6RB10840W**



- Trim features quick connect plug installed as standard installation
- High transmittance lens allowing for smooth, diffused light pattern
- Expected lifetime 50,000 hours
- All luminaires are intended for use with TRIAC type dimmers
- Class 2 power unit for use in dry or damp locations
- Five year warranty



\* Energy Star qualification  
can change without notice

# Interior Solutions - Downlights



## **4" HIGH EFFICACY LED DOWNLIGHT HOUSING** with 0-10V Dimming **#LF4LEDG4**

### **4" LITEFRAME LED OPEN DOWNLIGHT**

**15W, 1100LM, 3500K, 120-277V**  
**#4LFLED5G435KWT**

- Minimum 50,000 hours at 70% lumen maintenance system life
- Glare free optical control
- IP65 dust and water tight trim

### **6" LITEFRAME LED OPEN DOWNLIGHT**

**19W, 1500LM, 3500K**  
**#6LFED6G435KWH**

**19W, 1500LM, 4000K**  
**#6LFED6G440KWH**

- Minimum 50,000 hours at 70% lumen maintenance system life
- Comes standard with 0-10V dimming capability



\* Energy Star qualification can change without notice

## **LIGHTOLIER**

by **signify**



### **SLIMSURFACE LED 7"**

#### **S7R: DOWNLIGHT**

**14W, 1000LM, 2700K, 80 CRI, 120-277V**  
**#S7R827K10W-Z10U**

**14W, 1000LM, 3000K, 80 CRI, 120-277V**  
**#S7R830K10W-Z10U**

**14W, 1000LM, 4000K, 80 CRI, 120-277V**  
**#S7R840K10W**

- Surface Mount (Attaches to junction box)
- Expected lifetime 50,000 hours
- White finish color
- Five year warranty



\* Energy Star qualification can change without notice

# Interior Solutions - Downlights

## LIGHT TO GO MINI GIMBAL

### PMG: 3" LED ROUND MINI GIMBAL

**8W, 592LM, 3000K, 90 CRI, 120V**  
**#PMG3R06930NF1W**



- Minimum 50,000 hours at 70% lumen maintenance system life
- 30° tilt and 360° rotation
- Five year warranty



\* Energy Star qualification can change without notice

**PHILIPS**  
**Light to go**

## LIGHT TO GO MINI DOWNLIGHT

### PMD: 3" LED ROUND MINI DOWNLIGHT

**8W, 567LM, 3000K, 90 CRI, 120V**  
**#PMG3R06930NF1W**



- Minimum 50,000 hours at 70% lumen maintenance system life
- Five year warranty

# Interior & Exterior Solutions - Vaporlume

## INDUSTRIAL VAPORLUME LED DW

### DWAE: 4' VAPORLUME LED DW

**32W, 3699LM, 4000K, 80 CRI, 120-277V**  
**#DWAE35L8404UNV**

**46W, 5100LM, 4000K, 80 CRI, 120-277V**  
**#DWAE51L8404UNV**



### DWAE: 8' VAPORLUME LED DW

**130W, 14000LM, 4000K, 80 CRI, 120-277V**  
**#DWAE70L8408UNV**

**Day-Brite**  
**CFI**  
by **Signify**



\* DLC qualification can change without notice

- Sealed Industrial, suitable for wet locations
- Excellent for applications such as garages, stairwells, storage areas, horizontal shelf-mounted refrigerated cases and cold storage
- Surface or suspended mounted
- Dimming to 5% on 0-10V controls standard
- 100,000 hour rated life
- Five year luminaire limited warranty including LED boards and driver

# Exterior Solutions - Garage & Canopy

---

**PHILIPS**  
**Lightto go**

## **GARAGE AND CANOPY LED**

### **PGC: GARAGE AND CANOPY LED**

**37W, 4735LM, 4000K, 70 CRI, 120-277VAC**  
**#PGC40NWG1SM58BZ**

**57W, 6322 LM, 4000K, 70 CRI, 120-277VAC**  
**#PGC57NWG1SM58BZ**



- Compact and efficient
- Has durable, weather tight construction
- Rugged, UV-stabilized, frosted lens

*Durable, cost-effective lighting for parking garages,  
covered walkways and outdoor canopies*



---

# Exterior Solutions - Dusk to Dawn

---

**PHILIPS**  
**Lightto go**

## **SITE AND AREA LED**

### **PDTD: DUSK TO DAWN LED**

**40W, 4973LM, 4000K, 70 CRI, 120-277V**  
**#PDTD40NWG3AR5TLRPC**



- Direct mount hardware provided standard
- Easily retrofits onto existing arms
- Five year limited warranty

*Economical solution with enhanced generation  
chip on board LED performance for general  
purpose or security lighting.*



# Exterior Solutions - Flood Lights

## Compact Architectural LED Floodlight

**26W, 2448LM, 5000K, 70 CRI, 120-277V**

**#FSL-7**



\* DLC qualification can change without notice

### **Replaces up to 100MH/HPS**

- Seven high powered LEDs
- Ultra compact flood with wide beam NEMA 6 x 6 distribution for safety, security, façade, area, or signs
- Vented housing isolates LED module from driver maximizing product life and performance
- Traditional ½" x 14 NPS threaded adjustable knuckle mounting



## MINILITER LED Flood Light

**70W, 7860LM, 5000K, 70 CRI, 120-277V**

**#MHS-Y-30LU-5K-M-BZ**



\* DLC qualification can change without notice

### **Replaces up to 250W MH/HPS**

- 30 high powered LEDs driven at 700mA
- Intended for sign, façade, area, accent and general security lighting
- Drivers have greater than .90 power factor and less than 20% Total Harmonic Distortion
- Features heavy duty steel yoke with adjustable stainless steel hardware and mounting holes



# Exterior Solutions - Flood Lights

## LANDSCAPE B9 FLEXSCAPE LED

### B9: ACCENT LINE-VOLTAGE LUMINAIRE

#B9DCH



Philips Hadco FlexScape B9 accent line-voltage landscape luminaire has interchangeable optics 20°, 36° and 65° by switching optic lenses. This adjustable luminaire also has the ability to switch between 5 preset light outputs.

### Lumen Matrix

Wattage	Amps		4000K		
	120V	277V	Narrow	Medium	Wide
10W	80mA	50mA	1102	1097	1023
13W	110mA	55mA	1580	1573	1467
19W	155mA	75mA	2249	2240	2089
27W	225mA	100mA	3097	3087	2874
33W	275mA	120mA	3622	3598	3372

*Ideal for landscape lighting, signage, flag poles and building facades.*

- Adjustable knuckle stem provides range of rotation
- 0-10V dimming
- IP66 Rating—Dust tight and sealed against direct jets of water
- Five year limited warranty



# Exterior Solutions - Flood Lights



The Philips LED Floodlights offer energy saving LED technology for long life and reduced maintenance. Versatile and stylish with several sizes to choose from provides application flexibility for ground mount, wall mount, or pole mount installations.

## FLOODLIGHTS

### PFL: GENERAL PURPOSE FLOODLIGHTS

**20W, 2122LM, 4000K, 80 CRI, 120-277V**

**#PFL20NWG1KFL8BZ**

**#PFL20NW-G1PCB-KFL8BZ (w/photocell)**

**40W, 4433LM, 4000K, 80 CRI, 120-277V**

**#PFL40NWG1KFL8BZ**

**#PFL40NW-G1PCB-KFL8BZ (w/photocell)**

**80W, 8856LM, 4000K, 80 CRI, 120-277V**

**#PFL80-NW-G1-T-FL-8BZ**

**#PFL80NWG1-PCBTFL8BZ (w/photocell)**

**150W, 16325LM, 4000K, 80 CRI, 120-277V**

**#PFL150NWG1SFL8BZ**

**#PFL150NWG1TFL8BZ**

**#PFL150NW-G1PCBTFL8BZ (w/photocell)**



- Heat and impact resistant tempered glass lens
- Fade and abrasion resistant finish
- Entire luminaire including light engine and driver/electrical compartment IP66 rated in all aiming positions including upward aiming floodlighting applications
- Five year limited warranty

*Ideal for sign lighting, building facades, security lighting, and general purpose floodlighting applications.*

# Exterior Solutions - Wallpacks

---



## PERIMALITER LED WALLPACK

**72W, 6615LM, 4000K, 80 CRI, 120-277V**  
**#PVL3180L4KUDB**

- 180 high powered LEDs
- Vandal resistant polycarbonate cover
- Photocell and occupancy sensor options available
- Five year limited time warranty



## WGH LED GLASS WALLPACK

**54W, 6170LM, 4000K, 80 CRI, 120-277V**  
**#WGH110L4KUM**

- 110 mid powered LEDs
- Glass refractor



*Perimeter lighting for safety and security. Use on factories, warehouses, self storage, commercial buildings, etc.*

*Lower glare, better uniformity, higher efficacies and lower thermals for longer lasting electronic components*

## WGH GLASS LED WALLPACK

**102W, 11838LM, 4000K, 80 CRI, 120-277V**  
**#WGH225L4KUM**

- 225 mid powered LEDs
- Glass refractor





# Exterior Solutions - Wallpacks



## WALL MOUNT

### PPW: LOW PROFILE WALL MOUNT

**15W, 1656LM, 4000K, 80 CRI, 120-277V**  
#PPW15-NW-G1-8-BZ

**30W, 3090LM, 4000K, 80 CRI, 120-277V**  
#PPW30-NW-G1-8-BZ

**50W, 5114LM, 4000K, 80 CRI, 120-277V**  
#PPW50-NW-G1-8-BZ



## WALL PACK

### PWP: TRADITIONAL WALL PACK

**30W, 3355LM, 4000K, 70 CRI, 120-277V**  
#PWP30-NW-G1-8-BZ  
#PWP30-NW-G1-PCB-8-BZ (w/photocell)

**50W, 5541LM, 4000K, 70 CRI, 120-277V**  
#PWP50-NW-G1-8-BZ  
#PWP50-NW-G1-PCB-8-BZ (w/photocell)

**75W, 8999LM, 4000K, 70 CRI, 120-277V**  
#PWP75-NW-G1-8-BZ  
#PWP75-NW-G1-PCB-8-BZ (w/photocell)



*The Philips Wall pack family features energy saving LED technology ideal for wall mounted applications. The Wall pack is available in three sizes to accommodate multiple mounting heights. 30, 50, and 75W options are available to provide 70-250W HID equivalent illumination.*

# Exit Signs

---

## **CE SERIES LED EMERGENCY EXIT**

**#CEG, #CEGR, #CER, #CERRC**

**White Thermoplastic, Universal Face, Green or Red Letters**

**Remote capacity or extended runtime option**

- LED life-cycle of more than 10 years
- Wall or ceiling mounting
- Suitable for damp locations
- Dual voltage 120 or 277V AC input
- Canopy included
- Two year full unit warranty




## **CC SERIES LED COMBINATION EXIT/EMERGENCY LIGHT**

**#CCG, #CCGRC, #CCR, #CCRRC**

**White Thermoplastic, Universal Face, Green or Red Letters**

**Remote capacity or extended runtime option available**

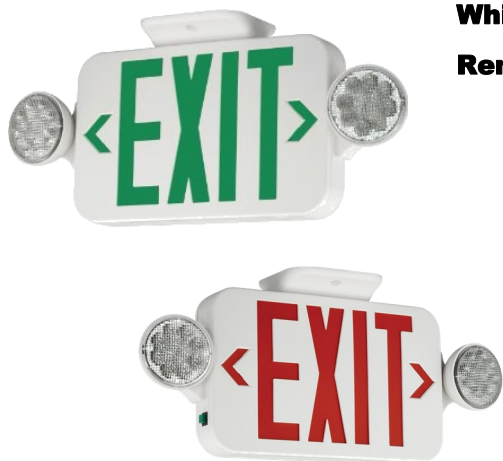

- LED life-cycle of more than 10 years
- Suitable for damp locations
- Dual-voltage 120 or 277V AC input
- Includes long-life Nickel Cadmium or Nickel Metal Hydride battery for UL recognized 90 minute emergency lighting
- Lamp-heads are fully adjustable
- Canopy included
- Two year full unit warranty

# Emergency Lights

---

## **CU2 SERIES LED EMERGENCY LIGHT**

**#CU2**

### **White Thermoplastic LED Emergency Light**

- LED life-cycle of more than 10 years
- Suitable for damp locations
- Fully adjustable lamp-heads
- Two year full unit warranty



## **CIR SERIES LED INDOOR REMOTE**

**#CIRD (DOUBLE), #CIRS (SINGLE)**

### **White Thermoplastic LED Based Remote Emergency Light**

- Single or double lamp-head remote with base-plate
- LED life cycle of more than 10 years
- Suitable for damp locations
- Fully adjustable lamp-heads
- Two year full unit warranty



## **COR SERIES LED OUTDOOR REMOTE**

**#CORD (DOUBLE), #CORS (SINGLE)**

### **White Thermoplastic LED Outdoor Remote Emergency Light**

- Single and Double lamp-head outdoor remote with base
- LED lifecycle of more than 10 years
- Quick installation
- Fully adjustable lamp-heads
- Fully gasketed for application in wet environment
- Two Year full unit warranty



# PowPak Fixtures and Modules



## PowPak relay module

- Controls 1A of load or up to three drivers/ballasts
- Select either area sensing or individual fixture sensing
- Input 120/277V

- Capable of switching 5 A of general-purpose loads
- Optional low-voltage dry contact closure output provides integration to building management systems, HVAC, VAV, etc.

# Wireless Remotes



## Pico 2-button

- No wires—put it where it's most accessible
- Pedestal mount for tabletop use
- Surface mount anywhere with Claro wall plate
- 10-year battery life



### Pico 3-button with raise/lower Wireless Remote



# Lighting Controls

## Sensors



### Wireless Daylight Sensor

- One sensor is capable of switching, stepped dimming, and continuous dimming of multiple zones
- Intuitive test mode provides instant system verification
- 10-year battery life



### Radio Powr Savr wireless sensor


- Detects heat from people moving within an area to determine when the space is occupied.
- Wirelessly transmits the appropriate commands to the associated dimming or switching devices to turn the lights on or off automatically
- Mounting options include: wall, hallway or corner



### Wireless occupancy / vacancy sensor

- Supports advanced occupancy features, such as dependent occupancy groups and customizable occupied/unoccupied presets in some systems
- Multiple sensors can be added for extended coverage.
- Multiple ceiling-mount methods available for different ceiling materials
- 10-year battery life design

## Switches, Dimmers and Accessories



**Maestro  
Sensor  
Switches**



**Maestro Dual  
Technology  
Sensor Switch**



**Maestro  
Sensor  
Dimmers**



**Pico  
Wallbox  
Adapter**



**Claro-  
style  
Wallplate**

# LED Tunable Drivers



EVERLINE™

*Universal's Touch to Tune app utilizes Near-Field Communication (NFC) within the smart phone to communicate with the driver to send information between devices.*

*You are able to read and write (tune) from and to a compatible EVERLINE driver using a compatible Samsung device.*

## PROGRAMMABLE LED DRIVER

**700mA, 20W, UNV, 0-10V DIM**  
**#D700C20UNVPW-C**

**1050mA, 30W, UNV, 0-10V DIM**  
**#D10CC30UNVPW-C**

**1500mA, 55W, UNV, 0-10V DIM**  
**#D15CC55UNVPW-C**



In just a few steps, you can **TOUCH to TUNE**


**Step 1:** Open the *Touch to Tune* app on the Samsung device.



**Step 2:** Click on "Write". Select the driver you wish to tune and select the tune values.



**Step 3:** Position the device with the sticker over the "U" tag located on the EVERLINE driver. Listen and watch for confirmation that the driver is tuned.

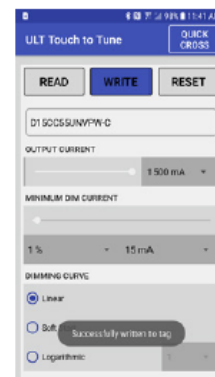

# Batteries

*If you're buying batteries anywhere locally, chances are you're paying too much.*

## Fluorescent Emergency Batteries

PS1400QD	POWER SENTRY PS1400QD 140	EMER BALLAST / REDUCED Power
PS600QD	POWER SENTRY PS600QD 600	FLUORESCENT BATTERY PACK
PSQ500QD	POWER SENTRY PSQ500QD	FLUORESCENT BATTERY PACK

## Emergency Batteries

VRLA12-12	12V 12AH/T2	RECHARGEABLE SEALED LEAD ACID BATTERY
VRLA12-6	6V 12AH/T1	MAINT. FREE SEALED LEAD ACID BATTERY
VRLA18-12	12V 18AH/W	RECHARGEABLE SEALED LEAD ACID BATTERY
VRLA4-6	6V 4.5AH/T1	MAINT. FREE SEALED LEAD ACID BATTERY
VRLA7-6	6V 7AH/20HR	RT670 LEAD ACID BATTERY
VRLA9-6	6V 9AH/T1	RECHARGEABLE SEALED LEAD ACID BATTERY

## Alkaline Batteries











AL9V-12	RAY-O-VAC 9 VOLT BATTERY	(12 PACK) 9 Volt
ALAA-24	RAY-O-VAC ULTRA PRO (AA)	24 PACK AA BATTERIES
ALAAA-18	RAY-O-VAC ULTRA PRO (AAA)	18 PACK AAA BATTERIES
ALC-12	RAY-O-VAC ULTRA PRO ALKAL	12 PACK C BATTERIES
ALD-12	RAY-O-VAC ULTRA PRO (D)	12 PACK D BATTERIES
DURACELL 9V	DURACELL 9V BATTERY	PRICE PER EACH (12/PK) P
PC1300	PROCELL ALKALINE "D" BATT	12/BULK PACK 1.5V
PC1400	PROCELL ALKALINE "C" BATT	12/ PACK 1.5V
PC1500TC24	PROCELL ALKALINE AA BATT	24/ PACK 1.5V
PC2400TC24	PROCELL ALKALINE AAA BATT	24/ PACK 1.5V



*CNR will beat any advertised price from local wholesalers and retailers in case quantities*

*AND... deliver them right to your door.*

# Wire Nuts and Connectors

	IDEAL <b>30-059</b> (100 ct) Wire nut, Black, High Temperature
	IDEAL <b>30-072</b> (100 ct) Wire nut, Blue
	IDEAL <b>30-073</b> (100 ct) IDEAL <b>30-073J</b> (300 ct) Wire nut, Orange
	IDEAL <b>30-074</b> (100 ct) Wire nut, Yellow
	IDEAL <b>30-076</b> (100 ct) Wire nut, Red
	IDEAL <b>30-341</b> (150 ct) Wire nut, Tan
	IDEAL <b>30-372</b> (25 ct) IDEAL <b>30-372J</b> (150 ct) Male/Female Ballast Disconnect
	IDEAL <b>30-1034</b> (100 ct) Push In Connector, 4 Port, Yellow
	IDEAL <b>30-1033</b> (100 ct) Push In Connector, 3 Port, Orange
	IDEAL <b>30-1032</b> (100 ct) Push In Connector, 2 Port, Red



# Recycling

---



**Don't forget to recycle!**

CNR, in close partnership with Veolia Environmental Services, have facilitated the recycling of more than 1400 tons of potentially hazardous waste since 2005!

Ask your CNR Account Executive for details on our recycling program and  
PITCH IN!







C.N. ROBINSON LIGHTING SUPPLY CO.

# ***Contact List***

www.cnrlight.com 1-800-545-0440

***Submit Quote Requests to:  
quotes@cnrlight.com***

## **Executive Team**

Robert Mills	President	rob@cnrlight.com	x124
Peter Gray	Vice President	pete@cnrlight.com	x123
Robert Hallsby	Controller	robh@cnrlight.com	x132

## **Sales Team**

Tim Davis	Project Sales Manager	tim@cnrlight.com	cell: 410-627-0747
Richard Deuber	Account Executive	rdeuber@cnrlight.com	cell: 443-833-2541
Eric Freeman	Account Executive (VA branch)	eric@cnrlight.com	cell: 443-833-2476
Nancy McCrone	Account Executive	nancy@cnrlight.com	cell: 443-833-4195
Angela Schwartz	Account Executive	angelas@cnrlight.com	cell: 443-812-0577
Robin Watt	Account Executive	rwatt@cnrlight.com	cell: 410-978-6603

## **Inside Sales/Customer Service Team**

Sara Bulles	Inside Sales	sara@cnrlight.com	x107
Leanna Bush	Customer Service	leanna@cnrlight.com	x118
Adrienne Falkenmayer	Inside Sales	adrienne@cnrlight.com	x115
Mike Fitch	Counter Sales	mikef@cnrlight.com	x117
Kelly Gray	Utility Programs Manager	kellyg@cnrlight.com	x130
Nick Kamali	Inside & Counter Sales (VA branch)	nick@cnrlight.com	x104
Donna Schools	Purchasing/Customer Service Mgr.	donnas@cnrlight.com	x116

## **Support Staff**

Sara Ballesteros	Business Development	sballesteros@cnrlight.com	x106
Tas Campbell	Accounts Payable	tcampbell@cnrlight.com	x122
Ron Harris	Project Assistant	rharris@cnrlight.com	x120
Michele Kurtz	Office Manager	michele@cnrlight.com	x102
Shelley Kurtz	Project Coordinator	shelley@cnrlight.com	x110
Judy Lewis	Accounts Receivable	judy@cnrlight.com	x121
Trisha Principe	Project Manager	trisha@cnrlight.com	x108
Carmen Reyes	Administrative Asst. (VA branch)	carmen@cnrlight.com	x100
Katie Shipley	Receptionist	katie@cnrlight.com	x101
Zane Wetzel	Project Administrator	zane@cnrlight.com	x111
Ron Vanorsdale	Warehouse Operations Manager	ronv@cnrlight.com	x125

CORPORATE HEADQUARTERS  
C.N. Robinson Lighting Supply Co.  
4318 Washington Blvd.  
Baltimore, Maryland 21227

VIRGINIA BRANCH  
CNR Lighting, LLC  
22560 Glenn Drive, Suite 112  
Sterling, Virginia 20164