

In-Stock Catalog

2022



C. N. Robinson Lighting Supply Co., Inc.

www.cnrlight.com

Baltimore: 800-545-0440 Virginia: 800-545-0441

Lighting... It's What We Do.

We are a dynamic and valued business partner.

We are always a step ahead, prepared for the changing of time and customer needs.

We are driven by strong values, accountability, and high standards.

We Are CNR.

And we are here for you now, just like we always have been, since 1870!



Table of Contents

Interior Solutions

Architectural Troffers w/Networked Sensors	3 - 4
Architectural Troffers	5
Flat Panels	6
Wraparounds	7 - 8
Strip Lights	9 - 10
Recessed Trim Kits	11
Downlights	12

Interior & Exterior Solutions

Vaportights	13
-------------	----

Exterior Solutions

Garage & Canopy	14
Flood Lights	15 - 16
Wallpacks	17 - 18
Area Lights	19
Exit Signs	21
Emergency Lights	22

Miscellaneous

Wire Nuts & Connectors	20
Lighting Controls	23 - 24
LED Tunable Drivers	25
Batteries	26
Recycling	27-28
Switchgear	29
Fuses	30

Interior Solutions - Architectural Troffers

Integrated Daylight Harvesting & Occupancy Sensors

LCAT: 2' x 2' LED Contemporary Architectural Troffer

29W, 3473LM, 4000K, 80 CRI, 120-277V, 0-10V DIM

#LCAT22-40MLG-DALIPU-ODPG

Columbia
LIGHTING



- High efficiency acrylic center lens features linear prisms for high performance without pixilation
- 60,000 hour LED at L80 (up to 150,000 projected life) for reduced maintenance
- 3000K, 3500K, 5000K available by order
- QR code traceability
- Recessed, surface, or cable mount
- Five year warranty (Terms and conditions apply)



LCAT: 2' x 4' LED Contemporary Architectural Troffer

39W, 4990LM, 4000K, 80 CRI, 120-277V, 0-10V DIM

#LCAT24-40MLG-DALIPU-ODPG



* DLC qualification can
change without notice

Interior Solutions - Architectural Troffers

Integrated Daylight Harvesting & Occupancy Sensors



FluxGrid 1' x 4' LED Architectural Troffers

24.5W, 3000 LM, 4000K, 120-277V, 80 CRI, 0-10V DIM

#1FGG38L840-4-D-UNV-DIM-SWZDT

31.9W, 3800 LM, 4000K, 120-277V, 80 CRI, 0-10V DIM

#1FGG38L840-4-D-UNV-EMLED-DIM-DAYOCC

- Access to the boards and driver from below
- TM-21 predicted L70 lumen maintenance up to 85,000 hours
- Offers architectural appeal
- Two different lens styles available by order
- Discrete air handling available by order
- Integral emergency available by order
- Five year warranty (Terms and conditions apply)

FluxGrid 2' x 2' LED Architectural Troffers

27.1W, 3000 LM, 4000K, 120-277V, 80 CRI, 0-10V DIM

#2FGG30L840-2-D-UNV-DIM-SWZDT

FluxGrid 2' x 4' LED Architectural Troffers

36.2W, 4300 LM, 4000K, 120-277V, 80 CRI, 0-10V DIM

#2FGG43L840-4-D-UNV-DIM-SWZDT

Interior Solutions - Architectural Troffers

FluxGrid 2' x 2' LED Architectural Troffers

33.4W, 3800 LM, 4000K, 120-277V, 80 CRI, 0-10V DIM

#2FGG38B840-2-D-UNV-DIM

FluxGrid 2' x 4' LED Architectural Troffers

33.9W, 4200 LM, 4000K, 120-277V, 80 CRI, 0-10V DIM

#P2FGG42B840-4-D-UNV-DIM



- Access to the boards and driver from below
- TM-21 predicted L70 lumen maintenance up to 85,000 hours
- Offers architectural appeal
- Two different lens styles available by order
- Discrete air handling available by order
- Integral emergency available by order
- Five year warranty (Terms and conditions apply)



LCAT: 2' x 2' LED Contemporary Architectural Troffer

29W, 3473LM, 4000K, 80 CRI, 120-277V, 0-10V DIM

#LCAT22-40MLG-EDU

LCAT: 2' x 4' LED Contemporary Architectural Troffer

39W, 4914LM, 3500K, 80 CRI, 120-277V, 0-10V DIM

#LCAT24-35MLG-EDU

39W, 4990LM, 4000K, 80 CRI, 120-277V, 0-10V DIM

#LCAT24-40MLG-EDU

- High efficiency acrylic center lens features linear prisms for high performance without pixilation
- 60,000 hour LED at L80 (up to 150,000 projected life) for reduced maintenance
- 3000K, 3500K, 5000K available by order
- QR code traceability
- Recessed, surface, or cable mount
- Five year warranty (Terms and conditions apply)



* DLC qualification can change without notice

Interior Solutions - Flat Panels

Color Selectable & Wattage Selectable

Selectable Backlit Panel 2' x 2' LED Flat Panel

30 to 39W, 3260 to 4247 LM, 3500 to 5000K,

120-277V, 80 CRI, 0-10V DIM

#2SBP3040L8CS-2-UNV-DIM



- Overall 1-1/2" deep luminaire, including driver box, provides minimal intrusion into the plenum space
- TM-21 predicted L70 lumen maintenance up to 67,000 hours per LED manufacturer LM-80 report.
- Standard configurations are 0-10V dimming to 5%
- Acrylic diffuser provides visual comfort and high efficiency.
- Flat opal lens is easy to clean and provides a uniform aesthetic on the ceiling plane.
- Tight enclosure assembly impedes ingress of dust and insects.
- Five year limited warranty includes LED boards and driver

Selectable Backlit Panel 2' x 4' LED Flat Panel

34 to 51W, 4138 to 5697 LM, 3500 to 5000K,

120-277V, 80 CRI, 0-10V DIM

#2SBP3550L8CS-4-UNV-DIM



Day-Brite
CFI
by **signify**

CNR Lighting: 800-545-0440



* DLC qualification can change without notice

Interior Solutions - Wraparounds

Color Selectable & PIR Sensor Switch - Suitable for Stairwells

NWL LED Wraparound with Color Select & PIR Sensor Switch

NWL: 4' LED Wraparound

34.3W, 4180LM, 3000 to 4000K, 120-277V, 0-10V DIM

#NWL440L8CSTUNVDIM-OCC



- White polycarbonate housing for durability
- Frosted polycarbonate lens for even, low glare lighting
- Power interconnect (both flush and 12" cable) provided to link fixtures together if desired
- Maximum number of fixtures linked together is 8.
- Integrated PIR occupancy sensor with 15 minute 100% to 20% delay time. Sensing diameter approximated 2x mounting height of fixture. Integrated on/off switch to engage sensor. Default factory setting is sensor off/ not engaged.
- Hardware for surface mounting included
- Suitable for damp locations.
- Five year limited warranty



* DLC qualification can change without notice

Day-Brite
CFI
by  **signify**

Interior Solutions - Wraparounds



CWP LED Wraparound

CRW: 4' LED Wraparound

37W, 4584lm, 4000K, 120-277V, 80CRI, 0-10V DIM

#CWP4-4040



- 54,000 hour LEDs at L70 for reduced maintenance
- Frosted acrylic lens
- 9" Wide
- Damp location label standard
- Five year limited warranty

Color Selectable & Wattage Selectable

CRW LED Wraparound with Color & Wattage Selectable

CRW: 4' LED Wraparound

28 to 40W, 3735 to 5880LM, 3500 to 5000K, 120-277V, 0-10V DIM

#CRW4-LSCS

- Up to 54,000 hour predicted L70 LED lumen for reduced maintenance
- Acrylic lens for superior efficiency, resistance to UV aging
- Steel housing and end caps
- Damp location label standard
- Five year limited warranty



* DLC qualification can change without notice

Interior Solutions - Strip Lights



FluxStream Linear Strip

FSSEZ: 4' LED Linear Strip

32W, 3653LM, 4000K, 80 CRI, 120-277V, DIM

#FSSEZ440L840UNV

- Up to 50,000 hour predicted L70 LED lumen maintenance
- Compact design for installation in tight spaces
- Can be surface mounted on ceilings or walls (ADA compliant), or suspended via chain, pendants or cables.
- Ideal for cold applications (-20°C)
- Frosted acrylic diffuser provides wide light distribution and superior glare control
- Enclosed lens minimizes penetration of dust, insects, and other debris into the lamp compartment
- Five year limited warranty



FluxStream Linear Strip

FSS: 4' LED Linear Strip

31W, 4130LM, 4000K, 80 CRI, 120-277V, DIM

#FSSEZ440L840UNV



* DLC qualification can change without notice

Interior Solutions - Strip Lights

FluxStream Industrial

FSI: 4' LED Industrial Strip

31W, 4169LM, 4000K, 120-277V, 80 CRI, 0-10V DIM

#FSI-440-L840-UNV-DIM

#FSI440L840-UNV-SDIM-LSXR10 (Step Dimming Occ Sensor)

Day-Brite

CFI

by **Signify**

- Up to 100,000 hour predicted L70 LED lumen maintenance
- Diffuser and LED plate snap into place allowing tool-free access to LED boards and driver
- Can be surface mounted on ceilings or walls (ADA Compliant), or suspended via chain, pendants or cables
- Frosted acrylic diffuser provides wide light distribution and superior glare control
- Ideal for cold applications (-20°C)
- Enclosed lens minimizes penetration of dust, insects, and other debris into the lamp compartment
- Five year limited warranty



FluxStream Linear Industrial

FSI: 8' LED Industrial Strip

90W, 11652LM, 4000K, 80 CRI, 120-277V DIM

#FSI8110L840-UNV-DIM

#FSI8140L840UNVDIM-SWZDT (Networked Sensor)



* DLC qualification can change without notice

Interior Solutions - Trim Kits

Color Selectable & Lumen Selectable

LIGHTOLIER

by  **signify**



Commercial Retrofit Downlight

6" Downlight

19W, 700LM/1000LM/1500LM, 3000K-4000K, 90CRI,

120/347V, 0-10V Dimming

#CR6RLMCCT

COREPRO LED 6"

8" Downlight

14W, 1000LM/1500LM,2300LM, 3000K-4000K, 90 CRI, 120/347V, 0-10V Dimming

#CR8RLMCCT

- L70 at 50,000 hours
- Ability to switch to three different lumen package. Select the desired lumen output using the switch before installation. Lumen output can be changed after installation by un-installing the luminaire from the ceiling
- Aluminum white painted with baffle.
- Expected lifetime 50,000 hours
- Trim is supplied with quick connect metal conduit with connector inside
- RoHS compliant.
- Class 1 power unit for use in a dry and damp locations
- Five year warranty



* Energy Star qualification
can change without notice

Interior Solutions - Downlights



4" High Efficacy LED Downlight Housing with 0-10V Dimming

#LF4LEDG4

4" Liteframe LED Open Downlight 15W, 1100LM, 3500K, 120-277V

#4LFLED5G435KWT

- Minimum 50,000 hours at 70% lumen maintenance system life
- Glare free optical control
- IP65 dust and water tight trim



6" Liteframe LED Open Downlight

19W, 1500LM, 3500K

#6LFED6G435KWH

19W, 1500LM, 4000K

#6LFED6G440KWH

- Minimum 50,000 hours at 70% lumen maintenance system life
- Comes standard with 0-10V dimming capability



* Energy Star qualification can change without notice

Interior & Exterior Solutions - Vaportite



- Full metal fixture liner
- Watertight housing
- Fiberglass housing is reinforced polyester and self extinguishing (ASTM-D635-74) plastic
- 1/2" conduit entry at each end of housing (standard) for continuous feed
- Polyurethane gasketing provides a continuous seamless seal for the diffuser lens
- Four sturdy cam latches clamp diffuser tightly for a positive seal between housing, gasketing and diffuser
- NSF International certified for NSF/ANSI Standard 2 – Food Equipment
- IP69 rated with wide or parking garage distributions
- Projected life is 60,000 hours at 91% lumen output
- 5-year limited warranty.

Industrial 4' Vaportite LED

4VT3: 4'

37W, 4900LM, 4000K, 80 CRI, 120-277V

#4VT3-LD5-4-G-UNV-L840-CD1-U

52W, 6000LM, 4000K, 80 CRI, 120-277V

#4VT3-LD5-6-G-UNV-L840-CD1-U



VTL8: 8' Vapor Tight LED

78W, 10,000LM, 4000K, 85 CRI, 120-277V

#VTL8-7K840-U

- Gasketed white fiberglass housing
- White enamel painted steel gear tray
- (12) White plastic molded retaining latches
- (4) Stainless steel mounting brackets
- Housing includes a plugged 1/2" conduit entry point at each end
- Suitable for wet locations
- IP65 rated for covered outdoor use
- 5-year limited warranty.



* DLC qualification can change without notice

Exterior Solutions - Garage & Canopy

Color Selectable & Wattage Selectable

Garage and Canopy LED

PGC: Garage and Canopy DualSelect LED

28 TO 60W, 4100 TO 7900LM, 4000K, 70 CRI, 120-277VAC

#GC60-SCT-G2-SM5-10BZ



- Selectable Color temperature: 3000K, 4000K and 5000K. CRI 70.
- UV stabilized polycarbonate lens with extruded silicone gasket
- Entire luminaire including light engine and driver/electrical compartment IP65 rated.
- Surge Protection: Each luminaire is provided as standard with 4kV surge protection.
- 5-year limited warranty.



Garage and Canopy LED

PGC: Garage and Canopy

57W, 6322LM, 4000K, 70 CRI, 120-277VAC

#GC57NWG1SM58BZ

KEENE

by  **signify**

- UV stabilized polycarbonate lens with extruded silicone gasket
- Entire luminaire including light engine and driver/electrical compartment IP66 rated
- Surge Protection: Each luminaire is provided as standard with 4kV surge protection.
- 5-year limited warranty.

*Durable, cost-effective lighting for parking garages,
covered walkways and outdoor canopies*

CNR Lighting: 800-545-0440



Exterior Solutions - Flood Lights

Landscape B9 FlexScape LED

B9: Accent Line-Voltage Luminaire

#B9DCH



Philips Hadco FlexScape B9 accent line-voltage landscape luminaire has interchangeable optics 20°, 36° and 65° by switching optic lenses. This adjustable luminaire also has the ability to switch between 5 preset light outputs.

Lumen Matrix

Wattage	Amps		4000K		
	120V	277V	Narrow	Medium	Wide
10W	80mA	50mA	1102	1097	1023
13W	110mA	55mA	1580	1573	1467
19W	155mA	75mA	2249	2240	2089
27W	225mA	100mA	3097	3087	2874
33W	275mA	120mA	3622	3598	3372

Ideal for landscape lighting, signage, flag poles and building facades.

- Adjustable knuckle stem provides range of rotation
- 0-10V dimming
- IP66 Rating—Dust tight and sealed against direct jets of water
- Five year limited warranty



Exterior Solutions - Flood Lights



The Philips LED Floodlights offer energy saving LED technology for long life and reduced maintenance. Versatile and stylish with several sizes to choose from provides application flexibility for ground mount, wall mount, or pole mount installations.

Floodlights

PFL: General Purpose Floodlights

20W, 2122LM, 4000K, 80 CRI, 120-277V

#FL20NWG1KFL8BZ

#PFL20NW-G1PCB-KFL8BZ (w/photocell)

40W, 4433LM, 4000K, 80 CRI, 120-277V

#FL40NWG1KFL8BZ

#PFL40NW-G1PCB-KFL8BZ (w/photocell)

80W, 8856LM, 4000K, 80 CRI, 120-277V

#FL80-NW-G1-S-FL-8-BZ

#PFL80-NW-G1-T-FL-8BZ

#PFL80NWG1-PCBTFL8BZ (w/photocell)

150W, 16325LM, 4000K, 80 CRI, 120-277V

#PFL150NWG1SFL8BZ

#PFL150NWG1TFL8BZ

#PFL150NW-G1PCBTFL8BZ (w/photocell)

- Heat and impact resistant tempered glass lens
- Fade and abrasion resistant finish
- Entire luminaire including light engine and driver/electrical compartment IP66 rated in all aiming positions including upward aiming floodlighting applications
- Five year limited warranty



Ideal for sign lighting, building facades, security lighting, and general purpose floodlighting applications.

Exterior Solutions - Wallpacks



Wall Pack

Lumark Axcent

44W, 5520LM, 4000K, 70CRI, 120-277V, 0-10V Dimming

#AXCS4A

#AXCS4ARL (w/ Refractive Lens)

- Available in 14W - 123W (1,800 - 17,000 lumens) models
- Full cutoff and refractive lens models available
- Energy and maintenance savings up to 95% compared to HID
- Energy efficient illumination results in up to 144 LPW
- Replaces 70W up to 450W HID equivalents



* DLC qualification can change without notice

Exterior Solutions - Wallpacks



Wall Pack

PWP: Traditional Wall Pack

30W, 3355LM, 4000K, 70 CRI, 120-277V

#PWP30-NW-G1-8-BZ

#PWP30-NW-G1-PCB-8-BZ (w/photocell)

50W, 5541LM, 4000K, 70 CRI, 120-277V

#PWP50-NW-G1-PCB-8-BZ (w/photocell)

75W, 8999LM, 4000K, 70 CRI, 120-277V

#PWP75-NW-G1-8-BZ

#PWP75-NW-G1-PCB-8-BZ (w/photocell)



The Philips Wall pack family features energy saving LED technology ideal for wall mounted applications. The Wall pack is available in three sizes to accommodate multiple mounting heights. 30, 50, and 75W options are available to provide 70-250W HID equivalent illumination.

Outdoor Solutions - Area Lights



HUBBELL
Outdoor Lighting

AIRO Micro Strike

Area/Site/road Lighter

100W, 12,000LM, 5000K, 120-277V, 70 CRI

#ASL1-160L-100-5K7-4W

Area/Site/road Lighter

135W, 18,000LM, 5000K, 120-277V, 70 CRI

#ASL1-160L-135-5K7-4W

- Die-cast housing with hidden vertical heat fins that are optimal for heat dissipation while keeping a clean smooth outer surface
- Corrosion resistant, die-cast aluminum housing with powder coat paint finish
- Separate optical and electrical compartment for improved thermal management and optimum component operation
- TGIC thermoset polyester powder paint finish applied at nominal 2.5 mil thickness
- Entire optical aperture illuminates to create a larger luminous surface area resulting in a low glare appearance without sacrificing optical performance
- IP65 optical assembly
- Five year warranty

Wire Nuts and Connectors

	IDEAL 30-059 (100 ct) Wire nut, Black, High Temperature
	IDEAL 30-072 (100 ct) Wire nut, Blue
	IDEAL 30-073 (100 ct) IDEAL 30-073J (300 ct) Wire nut, Orange
	IDEAL 30-074 (100 ct) Wire nut, Yellow
	IDEAL 30-076 (100 ct) Wire nut, Red
	IDEAL 30-341 (150 ct) Wire nut, Tan
	IDEAL 30-372 (25 ct) IDEAL 30-372J (150 ct)
	IDEAL 30-1034 (100 ct) Push In Connector, 4 Port, Yellow
	IDEAL 30-1033 (100 ct) Push In Connector, 3 Port, Orange
	IDEAL 30-1032 (100 ct) Push In Connector, 2 Port, Red



Exit Signs



CE Series LED Emergency Exit

#CEG, #CEGR, #CER, #CERRC

White Thermoplastic, Universal Face, Green or Red Letters

Remote capacity or extended runtime option

- LED life-cycle of more than 10 years
- Wall or ceiling mounting
- Suitable for damp locations
- Dual voltage 120 or 277V AC input
- Canopy included
- Two year full unit warranty




CC Series LED Combination Exit/Emergency Light

#CCG, #CCGRC, #CCR, #CCRRC

White Thermoplastic, Universal Face, Green or Red Letters

Remote capacity or extended runtime option available

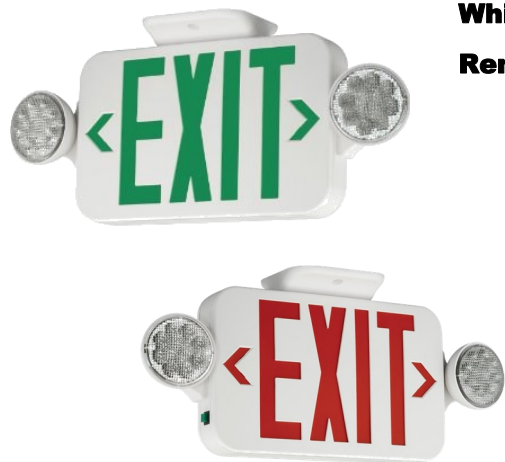

- LED life-cycle of more than 10 years
- Suitable for damp locations
- Dual-voltage 120 or 277V AC input
- Includes long-life Nickel Cadmium or Nickel Metal Hydride battery for UL recognized 90 minute emergency lighting
- Lamp-heads are fully adjustable
- Canopy included
- Two year full unit warranty

Emergency Lights



CU2 Series LED Emergency Light

#CU2

White Thermoplastic LED Emergency Light

- LED life-cycle of more than 10 years
- Suitable for damp locations
- Fully adjustable lamp-heads
- Two year full unit warranty



COR Series LED Outdoor Remote

#CORD (DOUBLE), #CORS (SINGLE)

White Thermoplastic LED Outdoor Remote Emergency Light

- Single and Double lamp-head outdoor remote with base
- LED lifecycle of more than 10 years
- Quick installation
- Fully adjustable lamp-heads
- Fully gasketed for application in wet environment
- Two Year full unit warranty

PowPak Fixtures and Modules



PowPak relay module

- Controls 1A of load or up to three drivers/ballasts
- Select either area sensing or individual fixture sensing
- Input 120/277V
- Capable of switching 5 A of general-purpose loads
- Optional low-voltage dry contact closure output provides integration to building management systems, HVAC, VAV, etc.

Wireless Remotes



Pico 3-button with raise/lower Wireless Remote

- No wires—put it where it's most accessible
- Pedestal mount for tabletop use
- Surface mount anywhere with Claro wall plate
- 10-year battery life

Lighting Controls

Sensors



Wireless Daylight Sensor

- One sensor is capable of switching, stepped dimming, and continuous dimming of multiple zones
- Intuitive test mode provides instant system verification
- 10-year battery life



Radio Powr Savr wireless sensor


- Detects heat from people moving within an area to determine when the space is occupied.
- Wirelessly transmits the appropriate commands to the associated dimming or switching devices to turn the lights on or off automatically
- Mounting options include: wall, hallway or corner



Wireless occupancy / vacancy sensor

- Supports advanced occupancy features, such as dependent occupancy groups and customizable occupied/unoccupied presets in some systems
- Multiple sensors can be added for extended coverage.
- Multiple ceiling-mount methods available for different ceiling materials
- 10-year battery life design

Switches, Dimmers and Accessories



**Maestro
Sensor
Switches**



**Maestro Dual
Technology
Sensor Switch**



**Maestro
Sensor
Dimmers**



**Pico
Wallbox
Adapter**



**Claro-
style
Wallplate**

LED Programmable LED Drivers



PROGRAMMABLE LED DRIVER

700mA, 20W, UNV, 0-10V DIM

#D700C20UNVPW-C

1050mA, 30W, UNV, 0-10V DIM

#D10CC30UNVPW-C

1500mA, 55W, UNV, 0-10V DIM


#D15CC55UNVPW-C



Universal's Touch to Tune app reads and writes (tune) from and to a compatible EVERLINE driver.

Batteries

If you're buying batteries anywhere locally, chances are you're paying too much.

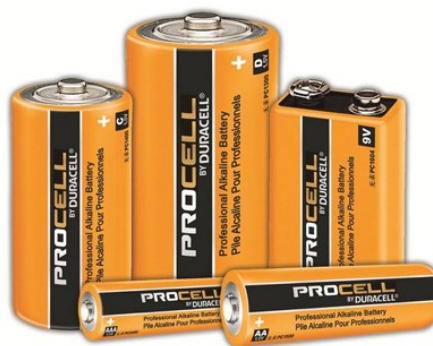

*CNR will beat any advertised price from local wholesalers and retailers in case quantities
AND... deliver them right to your door.*

Energizer®



DURACELL®

Bulk Recycling



Don't forget to recycle!

CNR, in close partnership with Veolia Environmental Services, have facilitated the recycling of more than 1400 tons of potentially hazardous waste since 2005!

Ask your CNR Account Executive for details on our recycling program and
PITCH IN!

Bulk Recycling is picked up by CNR and scheduled for bulk pickups by Veolia from our warehouse.

-Good for re-lamp and retrofit projects

-Billed on a unit pricing basis

-Lamps per linear foot

-Lamps per each

-Batteries or Ballast per pound



The bottom line...

The most effective way to protect against future liability is to ensure that the mercury in lamps is reclaimed by a reliable, reputable environmental service company. The same holds true for all types of universal wastes including batteries and electronic equipment.

Pre-paid Recycling

RecyclePak® makes recycling easy. When the container is full, simply ship it out, it's prepaid! it



One price includes everything you need to begin recycling -- packaging, prepaid freight from your facility, processing and certificates of recycling

A wide variety of packaging and sizes

Straight Fluorescent lamps

U-tubes and HIDs

CFLs

Ballast (non-pcb or TSCA Exempt)

Batteries

Mercury Devices



CNR Lighting: 800-545-0440

Switchgear

CNR Lighting now provides
Siemens Switchgear!

SIEMENS

- Switchboards
- Panelboards (stocked)
- Load Centers (stocked)
- Breakers (stocked)
- Disconnect Switches (stocked)
- Transformers
- Metering
- Control Products
- Medium Voltage
- Coordination Studies



Load Center



Safety Switch



General Purpose Breakers

Fuses

Need a fuse?

We are partnered with Mersen to bring you what you need.



- Fuses (class CC, RK1, RK5 stocked)
- Fuse Boxes
- Elevator Disconnects
- Fusible Shunt Trip Panels
- Surge Protection Devices
- LED Lighting Protection



Contact Information

Executive Team

Robert Mills	President	rob@cnrlight.com	x124
Pete Gray	Executive Vice President	pete@cnrlight.com	x123
Robert Hallskey	Controller	robh@cnrlight.com	x132

Sales Team

Tim Davis	Senior Project Sales Manager	tim@cnrlight.com	cell: 410-627-0747
Carlos Dorsey	Switchgear Sales Manager	cdorsey@cnrlight.com	cell: 540-940-7871
Steve Fentress	Account Executive - Project Sales	steve@cnrlight.com	cell: 202-438-4569
Alan Hoff	Account Executive (VA)	alan@cnrlight.com	cell: 240-856-6972
Nancy McCrone	Account Executive	nancy@cnrlight.com	cell: 443-833-4195
Angela Schwartz	Account Executive	angelas@cnrlight.com	cell: 443-812-0577

Inside Sales/Customer Service Team

Sara Bulles	Inside Sales	sara@cnrlight.com	x107
Leanna Bush	Customer Service	leanna@cnrlight.com	x118
Adrienne Falkenmayer	Inside Sales	adrienne@cnrlight.com	x115
Ron Harris	Counter Sales	rharris@cnrlight.com	x120
Chris Hommel	Inside Sales— switchgear & lighting	chommel@cnrlight.com	x103
Kelly Gray	Utility Programs Manager	kellyg@cnrlight.com	x130
Donna Schools	Purchasing Manager	donnas@cnrlight.com	x116

Support Staff

Chris Albright	Warehouse Operations Director	chris@cnrlight.com	x128
Jae Anderson	Operations Manager (VA)	jae@cnrlight.com	x104
Sara Ballesteros	Organizational & Business Development	sballesteros@cnrlight.com	x106
Aaron Brown	Shipping & Receiving	abrown@cnrlight.com	x128
Greg Brunson	Warehouse Associate		
Tas Campbell	Accounts Payable	tcampbell@cnrlight.com	x122
Daniel Duchatellier	Delivery Driver (VA)		
Mike Fitch	Project Bid Associate	mikef@cnrlight.com	x117
Charlye Harvey	Delivery Driver		
Michele Kurtz	Administrative Asst., Projects Team	michele@cnrlight.com	x102
Shelley Kurtz	Project Coordinator	shelley@cnrlight.com	x110
Judy Lewis	Accounts Receivable	judy@cnrlight.com	x121
Trish Principe	Quotations & Project Manager	trisha@cnrlight.com	x108
Katie Shipley	Office Manager & Receptionist	katie@cnrlight.com	x101
Zane Wetzal	Project Administrator	zane@cnrlight.com	x111

CORPORATE HEADQUARTERS
C.N. Robinson Lighting Supply Co.
4318 Washington Blvd.
Baltimore, Maryland 21227
410-242-4172

Submit Quote Requests to:
quotes@cnrlight.com
Submit Gear Requests to:
gear@cnrlight.com

VIRGINIA BRANCH
CNR Lighting, LLC
22560 Glenn Drive, Suite 112
Sterling, Virginia 20164